



- 
Protection
- 
Security
- 
Insulation
- 
Acoustic
- 
Functionality

- 
Structural
- 
Uv Filter
- Comply with**

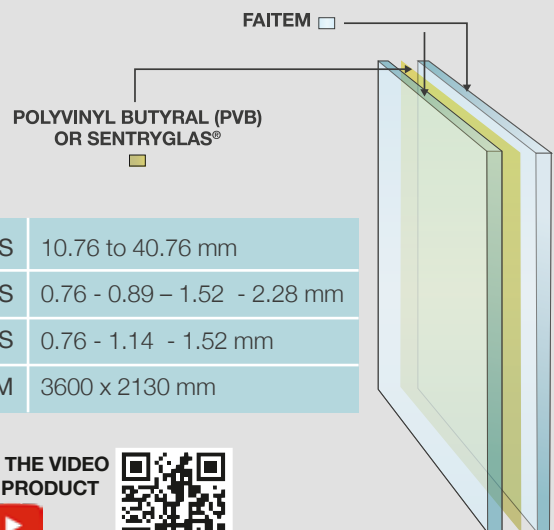

- It is a Tempered + Laminated Safety glass. Composed of two or more FAITEM glass sheets, joined together by one or more POLY-VINYL BUTYRAL (PVB) or SENTRYGLAS® interlayers, in a pressure and heat process, to achieve a maximum safety product.
- It is used to exhibit and protect against strong impacts and/or deflection loads.

BENEFITS

- Its structure poses an excellent acoustic barrier witch can be further improved using special Sound Control PVB.
- In case of breakage the interlayer holds the shattered pieces of glass to lower the risk of cuts.
- When it is manufactured with low emissivity or high solar factor is an effective thermic barrier.
- The interlayer filters up to 99 % of the harmful UV rays.
- Simple to install.
- It can be 2 or more layers.
- Achieve high levels of safety and protection.
- When manufactured with Sentryglas interlayer, it reaches higher levels of strength.
- Sentryglas® 100 times more rigid than PVB.
- Integrates the benefits of tempered glass and laminated glass.
- Ideal for keeping facades clean, without the use of steel grilles or rolling doors.
- It could be installed with its border exposed to any climatic conditions.

APPLICATIONS

- - Facades
- - Floors
- - Handrails
- - Doors
- - Glass stairs



GLASS THICKNESSES	10.76 to 40.76 mm
SENTRYGLAS THICKNESSES	0.76 - 0.89 - 1.52 - 2.28 mm
PVB THICKNESSES	0.76 - 1.14 - 1.52 mm
SIZE MAXIMUM	3600 x 2130 mm



LOOK AT THE VIDEO OF THE PRODUCT

